



Special features


- Waterproof design to install outdoors.
- Stainless steel durable buttons, anti-acidity and salinity.
- Anti-duress password function.

- Automatically temporarily unavailable when 3 password errors occurred.
- Built-in doorbell connector which can be installed in single embedded box.
- User password is available to set as 3~12-digit manner. 80 sets of password are available to divide into different sets for user to use and manage.
- Extra large bar size indicator light display board with keypad (red and green). Red and green glowing indicators to assist user to operate at night.


Specification

- | | |
|--|--|
| <ul style="list-style-type: none"> Power Supply : DC 12V \pm 15% Password length: 3~12-digit manner Set of password : 80 sets Operation mode : Standalone Keyboard: 3\times4, stainless steel buttons. Dimensions: 125L \times 70W \times 33H (mm). Weight: 320g (included wrapping). | <ul style="list-style-type: none"> Power consumption: 130mA (standby); 150mA (operation) \pm 5% Fireproof polycarbonate material for outer casing . Opening methods: 1. Password 2. Special system password Protection measure: Automatically temporarily unavailable for 20 seconds. Door closing time: 00-99 seconds
Setting 99 seconds as toggle state (suitable for security system) . Input point: 1. Exit push button 2. Anti-theft detection
3. Door sensing input Output point: 1. Door Open 2. Alarm output 3. Anti-tamper alarm output
4. Anti-Duress alarm output 5. Doorbell connector |
|--|--|

Waterproof

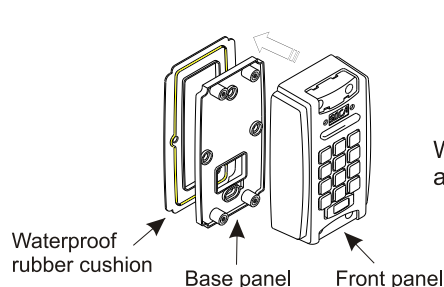

Waterproof rubber cushion at the back of the unit.



The front panel is waterproof.

Structure diagram

