



SW Exit Push Button Series




- Strong and durable SUS304 stainless steel button and panel design .
- Suitable for hollow door frame and electrical box use.
- For sole use or with different panels.
- Custom-made micro-switch according to user's requirements (such as waterproof or currents).

Specification

Item	SW-10AL	SW-10A
Indicator light	Available	Not Available
Power input	12VDC±20%(LED)	Not Available
Output	N.O. & N.C.	
Material	#304 Stainless steel	
Alternate action	Stepless	
Contract rating	5A@250VAC	
Mechanical Life	1,000,000 cycles	
Contact Life	100,000 cycles (Full load)	
Water-Proof	IP54	
Operating temperature	0~75°C	

Dimensions


【 Single switch 】

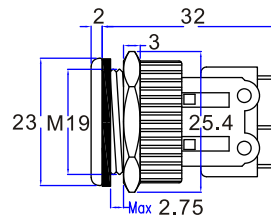


Unit:mm

【 Panel 】


SW-20P



SW-60P

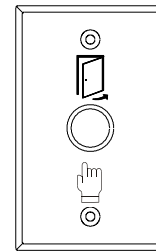


SW-80P



115×39×4.7(mm) 115×70×4.7(mm) 86×86×4.7(mm)

Waterproof

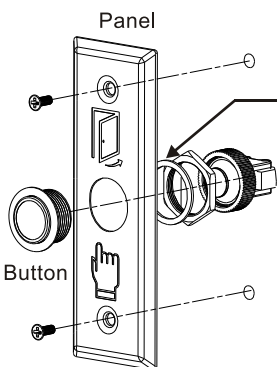

【 Installation of O-ring 】

- * Install O-ring behind the panel to connect both push button and the panel.
- * To achieve waterproof function, install the O-ring between the push button and the panel in order to seal without any seam gap. (The facade of the push button is waterproof.)

Model Number List

Type	Single switch	Package		
		SW-20A	SW-60A	SW-80A
SW-10A w/o LED	SW-10A	SW-20A	SW-60A	SW-80A
SW-10AL w/ LED	SW-10AB (Blue Light)	SW-20AB	SW-60AB	SW-80AB
	SW-10AR (Red Light)	SW-20AR	SW-60AR	SW-80AR
	SW-10AG (Green Light)	SW-20AG	SW-60AG	SW-80AG